


STARFLEX ULTRA



THE MANUAL POLYUREA

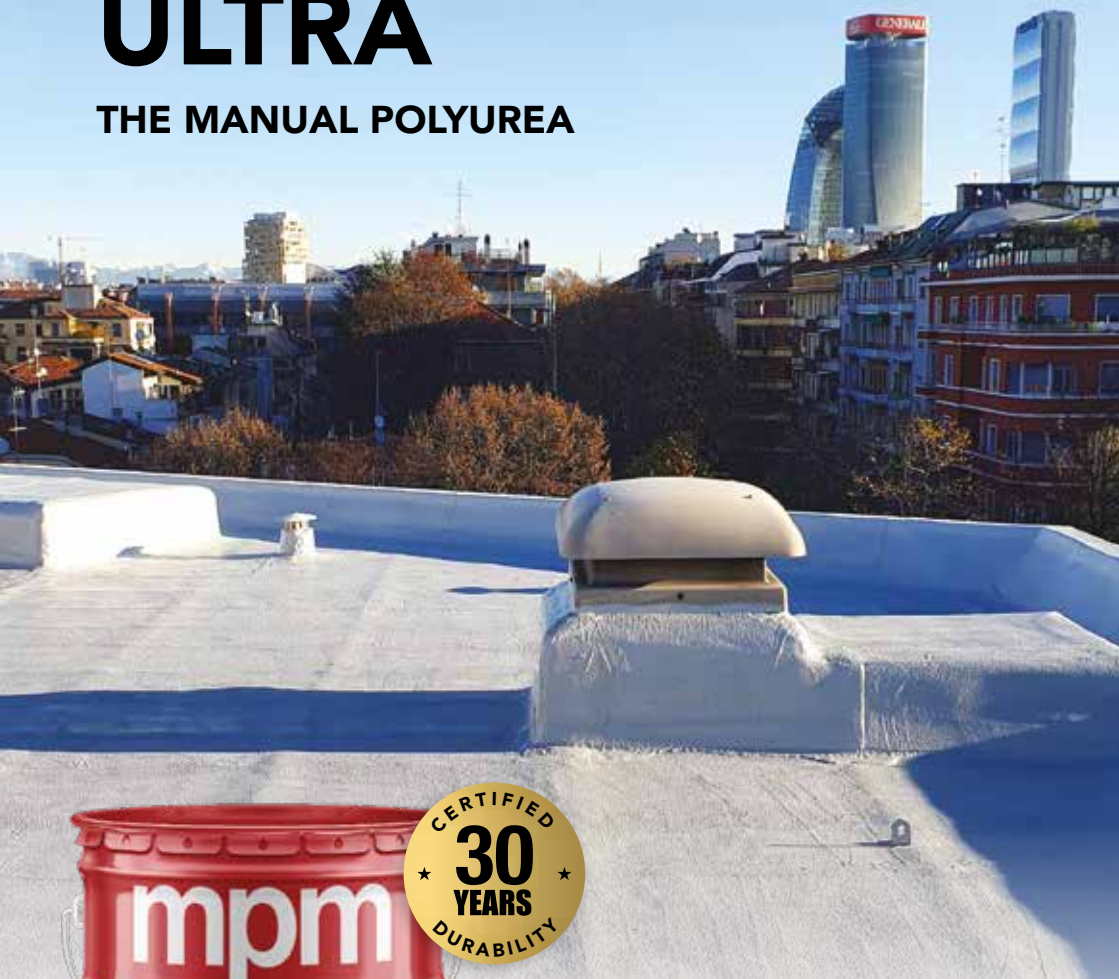


It permanently waterproofs
without removing the old floor

STARFLEX ULTRA

POLYURETHANE-BASED ONE-COMPONENT LIQUID MEMBRANE
FOR SEAMLESS WATERPROOFING ON ALL SURFACES

BENEFITS




It adheres to everything:
**sheath, PVC, concrete,
metal**, etc..




**Resistant to sun, rain,
wind, hail, snow
and other weather.**



Wet on wet application.
It reduces **installation times**
by up to 50%.



High thickness in a single
coat, even vertically.



Elasticity > 600%



Rain-safe
after 1 hour

QUICK AND EASY APPLICATION



BRUSH



ROLLER



AIRLESS SPRAYING

INSTALLATION STEPS

STEP 1



Cleaning of the substrate
and arrangement of the existing one.

STEP 2



Reinforcement of the perimeter and construction details with **STARFLEX ULTRA** liquid membrane and **STARTEX NW DETAILS** fabric.

STEP 3



Application of **MPM specific primer** for **ULTRA** on the existing substrate.

STEP 4



Application of a first coat of **STARFLEX** liquid membrane > 1,5 kg/sqm.

STEP 5



Drafting of **STARTEX** fabric, going over it with an unloaded roller.

STEP 6



Wet to wet application of a second coat of **STARFLEX ULTRA** liquid membrane > 1,0 kg/sqm.

■ SYSTEM ACCESSORIES



PRIMER



PRIMER 0130 R

Universal one-component rapid primer.
Adhesion on any substrates: bituminous sheath, PVC, tiles, concrete, metal, etc.

FINISH



STARFLEX MONO TOP

Aliphatic polyurethane top coat

SEALER



STARMASTIC P95

One component polyurethane sealant

FABRICS



STARTEX NW

Non-woven fabric
60 gsm
h 100 cm x 100 ml



STARTEX NW Details

Non-woven fabric
60 gsm
h 20 cm x 100 ml



STARTEX GM

Fiberglass
220 gsm
h 127 cm x 50 ml



STARTEX FC

Spunbond
80 gsm
h 100 cm x 100 ml

STRIPS



STARTEX TAPE BT

Adhesive butyl strip



STARTEX TAPE ET

Waterproof elastic strip



STARTEX CORNER IN

Elastic strip for internal corner




STARTEX CORNER OUT

Elastic strip for external corner

■ APPLICATION FIELDS



ROOFS AND ROOFING SYSTEMS

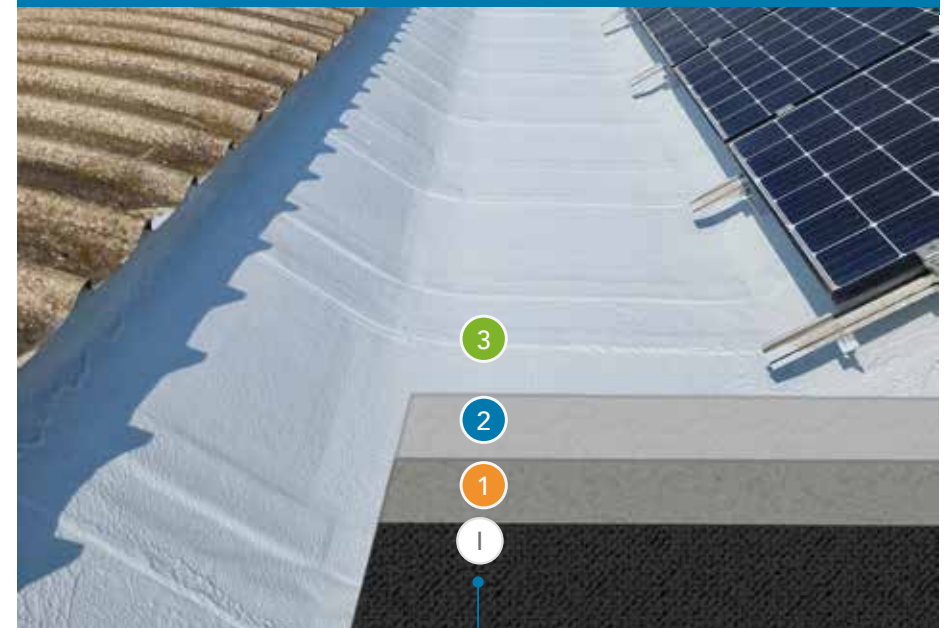

- 1 Substrate in concrete, sheath, PVC or other
- 1 MPM Specific primer
- 2 STARFLEX ULTRA liquid membrane
- 3 Possible MPM coloured top coat

For all applications,
it is always recommended
to use **Startex** reinforcements.

Why has **STARFLEX ULTRA** lasted 30 years?

Starflex ULTRA, unlike traditional waterproofing systems, is able to maintain its physical and mechanical characteristics over time, thanks to its innovative chemical composition.


70 YEARS OF CERTIFIED EXCELLENCE



30-years
certification



25-years
certification



fire certification
in severe conditions



product **safe**
for human health



Compliance with
the minimum
environmental criteria



Resistance to **hail**
impact



**Since 1955, the ideal
partner for your work.**

MIXER SRL - Divisione MPM

HQ: Via E. De Amicis 53 20123 Milano (MI)

OPS: Via Adda 15 20073 Opera (MI)

TEL: +39 02 576 09116 • @mpm_srl

info@mpmsrl.com • www.mpmsrl.com