


STARVENT

POLYPROPYLENE VAPOUR VENT FOR LIQUID WATERPROOFING
WITH PRE-WATERPROOFED FABRIC BASE

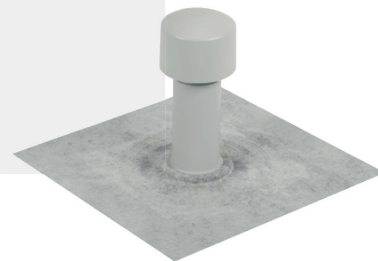

CHARACTERISTICS

Full compatibility with liquid waterproofing products.

Easy and quick to install.

Improves the breathability of the **STARFLEX** waterproofing system.

It can be used in combination with STARFLEX waterproofing or beneath an old bituminous membrane before carrying out the waterproofing.

FIELD OF APPLICATION

It is used as a system for removing residual moisture from substrates after installing the **STARFLEX** waterproofing membrane on concrete or bituminous membrane substrates:

- Flat roofs with bituminous membrane
- Concrete flat roofs, including those used for parking
- Roof terraces
- Terraces

TECHNICAL DATA

Colour	White and grey
Dimensions	Ø 75 mm H 200 mm
Weight	200 g/m ²

The data and instructions given in this data sheet, based on our best practical and laboratory experience, are to be considered indicative in all cases. Given the different conditions of use and the involvement of factors beyond MPM's control (substrate, environmental conditions, technical supervision of the installation, etc.), anyone intending to use the product is required to determine whether or not the product is suitable for the intended use. Our warranty obligation is limited to the quality and consistency of the finished product for the data given above, and applies only to technical data sheets accompanied by the stamp and countersignature of the authorised personnel of our head office. Furthermore, the customer is required to verify that these values are valid for the product batch of interest and have not been exceeded and/or replaced by subsequent editions and/or new formulations. The data contained herein may change at any time without any obligation of prior notice on the part of MPM.